


179.00 EUR
incl. 19% VAT, plus [shipping](#)

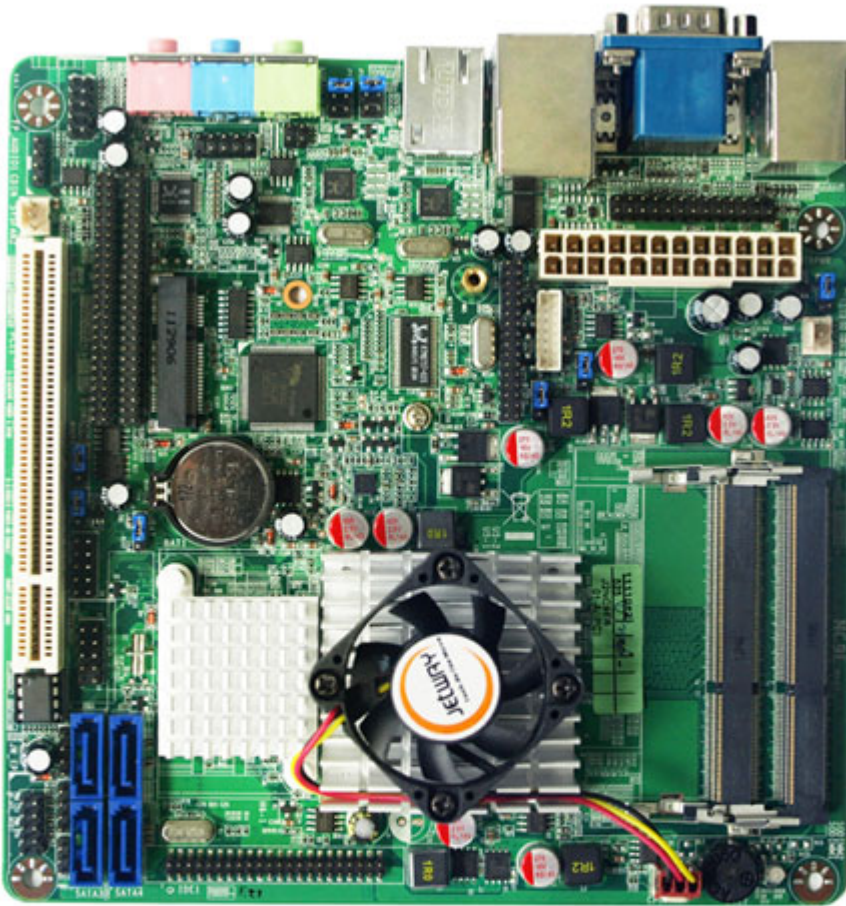

- INTEL® Pineview-D + NM10 Chipset
- Support INTEL®ATOM D525 Dual-Core (1.83GHz) CPU
- Supports 2 * Gigabit LAN
- Integrated Realtek ALC662 HD Audio Code with 6-Channel
- Support Watch dog Technology
- Compliance with ERP standard
- Mini-ITX Form Factor(170mm x 170mm)
- Support Daughter board Expansion

| | |
|------------------------|---|
| CPU | • INTEL ® Atom Dual-Core Processor D525 (45nm,1.80GHz,1024MB L2 Cache) |
| Chipset | • INTEL®Atom D525 + NM10 chipset • Build-in INTEL®GMA 3150 Graphics Core (DVMT Max. 384MB) |
| Memory | • 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB |
| Expansion Slots | • 1 * PCI slot • 1 * Mini PCI-E socket |
| Storage | • 4 * Serial ATA2 3Gb/s connectors support RAID 0, 1, JBOD • 1 * IDE connector |
| Audio | • Realtek ALC662 HD Audio Code with 6-Channel |
| Ethernet LAN | • Realtek RTL8111EVL PCI-E Gigabit Ethernet LAN |

| | |
|-------------------------|---|
| USB | <ul style="list-style-type: none"> • Embedded 7 * USB 2.0/1.1 |
| Special Features | <ul style="list-style-type: none"> • Support ACPI S3 • Support CPU Smart FAN & DC FAN |
| LVDS | <ul style="list-style-type: none"> • Onboard 18-bit Single Channel LVDS connector |
| Rear Panel I/O | <ul style="list-style-type: none"> • 4 * USB 2.0/1.1 ports • 1 * PS/2 KB/MS connector • 2 * RJ-45 port • 1 * Audio I/O port (Line-in, MIC and Line-out) • 1 * VGA port • 1 * COM port |
| Internal I/O | <ul style="list-style-type: none"> • 3 * USB 2.0 ports • CPU / Chassis Fan connectors • 1 * 24-pin ATX Power connector • 1 * COM header (COM2 for RS-232/422/485) • 1 * AUDIO_IN header • 1 * Parallel header • 1 * GPIO header |
| BIOS | <ul style="list-style-type: none"> • Award 8MB DIP-SPI Flash ROM |
| Functional | <ul style="list-style-type: none"> • ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Transportation, Financial Application |
| Packing | <ul style="list-style-type: none"> • Color Box Dimension ■ 200(W) x 200(D) x 70(H)mm • Cases Gross Weight ■ 15.4KGS • Cases Net Weight ■ 10.3KGS • 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm |
| Certificate | <ul style="list-style-type: none"> • CE, FCC, RoHS |
| Temperature | <ul style="list-style-type: none"> • Operating within 0~60 centigrade • Storage within -20-85 centigrade |
| Form Factor | <ul style="list-style-type: none"> • Mini ITX Form Factor(170mmx170mm) |